


SPARTUS® EasyMIG 210

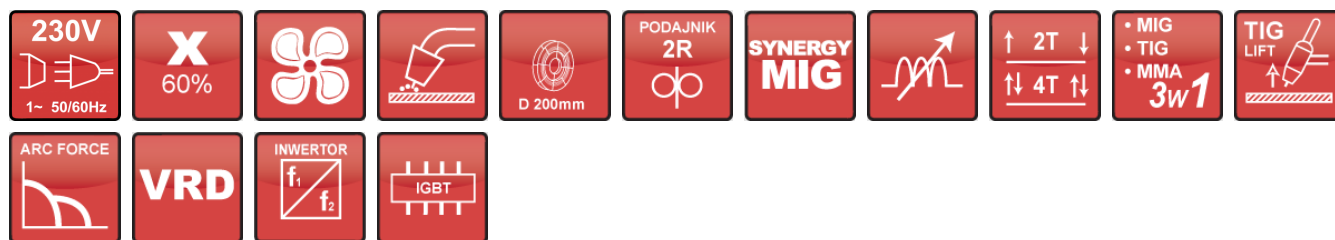

SPARTUS® EasyMIG 210

Product code:

EasyMIG210_pak_15-3



Package equipped: • **Device SPARTUS® EasyMIG 210** • **MIG gun SPARTUS® SPE 150 3m** • Electrode holder • Work Clamp • Gas hose • User's manual

Product description

MIG 3in1 with synergic MIG/MAG welding

SPARTUS® EasyMIG 210 is a modern, inverter welding semi-automatic device, based on IGBT transistors. It enables welding by means of a consumable electrode shielded by inert (MIG) or active (MAG) gases, welding with coated electrode (MMA) and TIG lift welding. In addition, the device thanks to the ability to change the polarity of welding, enables welding with flux cored welding wire without gas.

The maximum welding current for the MIG / MAG / TIG method is 200A. For the MMA welding method it is 160A. The unit is powered from single-phase network 230V.

SPARTUS® EasyMIG210 is equipped with **synergistic programs for MIG / MAG welding** with steel wires in the range diameter 0,6 / 0,8 / 1,0 mm. In addition, the device has an ability to manually adjust set parameters.

Easy change of polarity allows a gas-free self-shielding wire welding.

Thanks to the use of modern technological solutions, the welder is equipped with a number of functions supporting the welding process:

- 2T / 4T - possibility to choose one of two operating modes (MIG/ MAG)
- welding inductivity regulation — face fusion width and deep control (MIG/MAG), reduction of welding splinters
- Hot Start - an easier electrode ignition (MMA)
- Arc Force - an easier welding in forced positions (MMA)
- VRD - reduced no-load voltage (MMA)

Professional two-roller feeder allows smooth and uniform feed of the welding wire. Stable output parameters ensure obtaining high-quality weld.

Examples of use: workshop, portable repair, automotive, exhaust silencer welding.

Technical parameters

Input	~1× 230V ± 10% 50 / 60 Hz
Welding current MIG [A]	50 - 200
Duty cycle MIG [%]	60
Output working voltage [V]	16.5 - 24
Wire feeding speed [m/min]	2 - 12.5
Wire feeder	built-in, 2-roll gear
Welding wire spool [kg]/[mm]	≤5 / 200
Wire diameter Ø [mm]	0.6, 0.8, 1.0
Additional features	spool gun, 2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, wire test, change polarity, manual adjustment of parameters, inductance control, synergy, gas test, MMA welding

Welding current TIG [A]	10 - 200
Duty cycle TIG [%]	60
Welding current MMA [A]	10 - 180
Duty cycle MMA [%]	60
Current consumption [A]	35 (MIG) / 26 (TIG) / 33 (MMA)
Power factor ($\cos\phi$)	0,76
Efficiency η [%]	85
Insulation class	H
Protection class	IP21S
Weight [kg]	12,5
Dimensions [mm]	490 x 230 x 330

PRODUCT CATEGORIES: [WELDING MACHINES](#), [MIG](#)

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPERTHERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.