


SPARTUS® EasyMIG 270LCD



SPARTUS® EasyMIG 270LCD

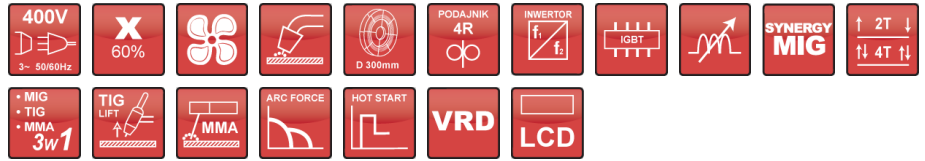

Product code:

EasyMIG270lcd_pak_24-3

Package equipped: • Device SPARTUS® EasyMIG 270LCD • MIG gun SPARTUS® SPE 240 3m • MIG toolbox (consumable kit) • Passive helmet SPARTUS® Easy with flap • Electrode holder • Work Clamp • Gas hose • User's manual

Product description

SYNERGIC IGBT COMPACT WITH LCD DISPLAY

SPARTUS® EasyMIG 270LCD is modern, inverter and professional MIG/MAG welding machine with inert or active gas shielding and MMA coated electrode welding. SPARTUS® EasyMIG 270LCD is powered by 400V three-phase. The maximum welding current for SPARTUS® EasyMIG 270LCD is 250A for MIG/MAG and 230A for MMA. 60% high working cycle ensures stable output parameters during long-term welding work.

SPARTUS® EasyMIG 270LCD is equipped in the **synergy system for MIG/MAG welding** with the ability to manually change parameters. You can choose the following programs: CO2 steel, mixed steel, core wire welding. Making the synergy correction is signalled by flashing LED on the device's panel.

The device is equipped with the following programs: CO2 steel, mixed steel, aluminium, core wire welding, as well as manual welding mode.

SPARTUS® EasyMIG 270LCD has a set of features supporting the welding process: **2T/4T work mode, inductance regulation, Arc Force, Hot Start and VRD.**

The modern LCD allows an easy and quick setting of the welding voltage and to manage the device functions. When the parameters are corrected, the display sets the weld shape dependence regarding the voltage and shows graphically the recommended thickness of the material for the given current.



LCD display

Professional four-roller feeder ensures stable welding wire feed. Resistant, robust and compact design makes it perfect equipment for difficult conditions, and there is a possibility of mounting a technical gas cylinder on the chassis of the device.

SPARTUS® EasyMIG 270LCD is a compact device designed mostly for efficient welding of steel constructions and working in difficult workshop conditions.

Technical parameters

| | |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Input | ~3x 400V ± 10% 50 / 60 Hz |
| Welding current MIG [A] | 50 - 250 |
| Duty cycle MIG [%] | 60 |
| Output working voltage [V] | 16,5 - 26,5 |
| Wire feeding speed [m/min] | 2 - 18 |
| Wire feeder | built-in, 4-roll gear |
| Welding wire spool [kg]/[mm] | ≤ 15 / 200/300 |
| Wire diameter Ø [mm] | 0.8, 1.0, 1.2 |
| Additional features | 2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, wire test, change polarity, inductance control, brazing (CuSi3), MMA welding, Post-gas |
| Welding current TIG [A] | 10 - 250 |
| Welding current MMA [A] | 10 - 220 |
| Current consumption [A] | 12 |
| Weight [kg] | 39 |
| Dimensions [mm] | 920 x 470 x 740 |

PRODUCT CATEGORIES: [WELDING MACHINES](#), [MIG](#)

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPER THERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.