


SPARTUS® EasyMIG 320LCD

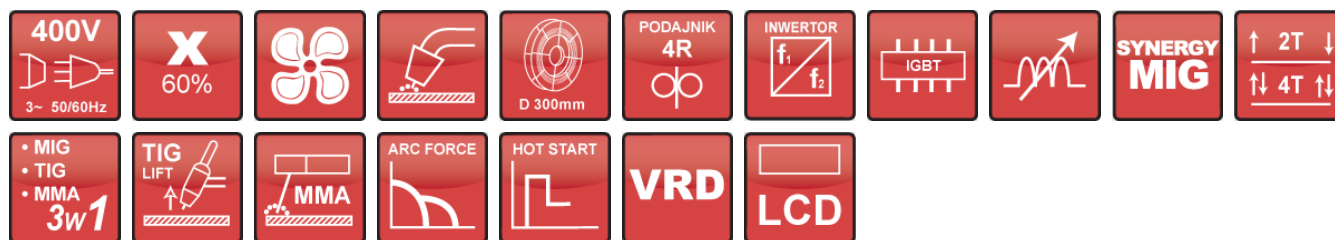

SPARTUS® EasyMIG 320LCD

Product code:

EasyMIG320LCD_pak_24-3



Package equipped: • **Device SPARTUS® EasyMIG 320LCD** • **MIG gun SPARTUS® SPE 360 - 3m** • **MIG toolbox (consumable kit)** • **Passive helmet SPARTUS® Easy with flap** • **Electrode holder** • **Work Clamp** • **Gas hose** • **User's manual**

Product description

SYNERGIC AND STRONG IGBT MIG WITH LCD DISPLAY

SPARTUS® EasyMIG 320LCD is modern, inverter and professional MIG/MAG welding machine with inert or active gas shielding and MMA coated electrode welding. SPARTUS® EasyMIG 320LCD is powered by 400V three-phase. The maximum welding current for SPARTUS® EasyMIG 320LCD is 300A for MIG/MAG and 250A for MMA. 60% high working cycle ensures stable output parameters during long-term welding work.

SPARTUS® EasyMIG 320LCD is equipped in the **synergy system for MIG/MAG welding** with the ability to manually change parameters. You can choose the following programs: CO2 steel, mixed steel, core wire welding. Making the synergy correction is signalled by flashing LED on the device's panel.

The device is equipped with the following programs: CO2 steel, mixed steel, aluminium, core wire welding, as well as manual welding mode.

SPARTUS® EasyMIG 320LCD has a set of features supporting the welding process: **2T/4T work mode, inductance regulation, Arc Force, Hot Start and VRD.**

The modern LCD allows an easy and quick setting of the welding voltage and to manage the device functions. When the parameters are corrected, the display sets the weld shape dependence regarding the voltage and shows graphically the recommended thickness of the material for the given current.



Professional four-roller feeder ensures stable welding wire feed. Resistant, robust and compact design makes it perfect equipment for difficult conditions, and there is a possibility of mounting a technical gas cylinder on the chassis of the device.

SPARTUS® EasyMIG 320LCD is a compact device designed mostly for efficient welding of steel constructions and working in difficult workshop conditions.

Technical parameters

Input	~3× 400V ± 10% 50 / 60 Hz
Welding current MIG [A]	50 - 300
Duty cycle MIG [%]	60
Output working voltage [V]	16,5 - 26,5
Wire feeding speed [m/min]	2 - 18
Wire feeder	built-in, 4-roll gear
Welding wire spool [kg]/[mm]	≤ 15 / 200/300
Wire diameter Ø [mm]	0.8, 1.0, 1.2
Additional features	2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, wire test, change polarity, inductance control, brazing (CuSi3), MMA welding, Post-gas
Welding current TIG [A]	10 - 300
Welding current MMA [A]	10 - 280
Current consumption [A]	12
Weight [kg]	39
Dimensions [mm]	920 x 470 x 740

PRODUCT CATEGORIES: [WELDING MACHINES](#), [MIG](#)

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPERTHERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.