



Product code:	LASER-EASY3000-PAK2
Status:	News

Product description

SPARTUS® EASY 3000 - INNOVATIVE TECHNOLOGY FOR WELDING, CUTTING AND CLEANING **MATERIALS**

The SPARTUS® Easy 3000 laser welder is the key to achieving unparalleled quality in connections. This device surpasses traditional welding methods like MIG or TIG due to the exceptional precision it offers. The laser enables the creation of significantly smaller, microscopic-sized welds, thereby minimizing the heataffected zone on the surrounding material. Consequently, laser welding is an excellent choice for joining even the tiniest components that are challenging to weld using other welding methods.

ADVANTAGES OF SPARTUS® Easy 3000:



High precision weldinga Excellent control over the welding process Limited material distortion Clean welds that require no post-processing Application in hard-to-reach areas Optimized production time Durable and resilient joints Capability to join, cut, and clean various materials



High-end laser source

WIRE FEEDER

The SPARTUS® Dual Wire Feeder has been designed to enhance efficiency and quality in the welding processes within the most demanding industrial environments. Thanks to its innovative design that allows the use of two welding wires, this feeder is the ideal solution for Easy laser welders, offering a range of benefits to its users





INCREASED PRODUCTIVITY The dual wire feeder reduces downtime associated with spool changes, contributing to faster and more efficient production cycles.

VERSATILITY The dual wire feeder allows for quick adaptation to changing design requirements.

PROCESS OPTIMIZATION Users can easily switch between wires of different diameters or properties to tailor the welding process to specific tasks, ensuring high-quality welds and work efficiency

IMPROVED WELD QUALITY Thanks to the ability to use dual wire for the welded material, the SPARTUS® feeder ensures better alignment in larger gaps, resulting in more durable and aesthetically pleasing welds.

OPERATIONAL COST REDUCTION Long-term benefits such as reduced downtime and improved work efficiency lead to significant savings.

WELDING MATERIALS



Butt welding (maximum thickness)





SPARTUS® LASER HEAD F230 The modern laser head allows for focal length adjustment. Additionally, it is equipped with a welding wire feeder mechanism. Ergonomic and user-friendly, it ensures precise and comfortable operation for the operator. Comes with a set of starter nozzles.


As an option, there's the possibility to switch the F210 head.

ONE DEVICE, MULTIPLE FUNCTIONS

SPARTUS® Easy 3000 is not only used for welding but also for cutting and cleaning various materials.

Laser cutting allows for precise material separation, creating accurate and clean edges without the need for mechanical processing. The cutting function as an additional device option allows cutting stainless steel up to 2mm and carbon steel up to 1.5mm. Copper and aluminum, as materials with a high beam reflection coefficient, should not be subjected to the laser cutting process.

Laser cleaning is an effective method for removing contaminants, paint layers, or rust from material surfaces while preserving their integrity and quality. Thanks to these laser technology applications, we achieve exceptional material processing efficiency with minimal impact on their structure.

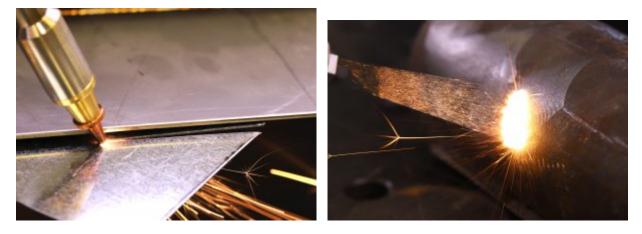

MULTILINGUAL MENU

The device interface is available in the following languages: • Polish • English • German • French • Spanish • Italian • Czech • Slovak • Greek • Romanian • Portuguese • Korean • Turkish • Russian

GWARANCJA Spawarki laserowe SPARTUS® objęte są 24 miesięczną gwarancją.

THE SET INCLUDES



laser source F230 handheld laser head (7m) with F150 focus lens (as an option, there's the possibility to switch the F210 head) double wire feeder with 4 wire guide rollers 1.2 - 1.6V fi37 single insulated steel liner singe teflon liner double insulated steel liner



2 wire guide rollers 0.8 - 1.0V fi37 4 wire guide rollesr 2.0 -2.5V fi37 head support for double liner 3 single welding nozzles 4 single wire feeder tips protective lenses

Technical parameters

Input	~3× 400V ± 10% 50 / 60 Hz
Output power	3000W
Operating mode	ciągły/modulowany
Duty cycle [%]	100
Scanning speed	2 - 6000 mm/s
Scanning width	0 - 8 mm
Frequency	5 - 5000 Hz
Weight	220 kg
Dimensions [mm]	1140 x 595 x 1080mm

Other informations

PRODUCT CATEGORIES: LASER WELDERS, LASER

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPERTHERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.