


SPARTUS® EasyMIG 320

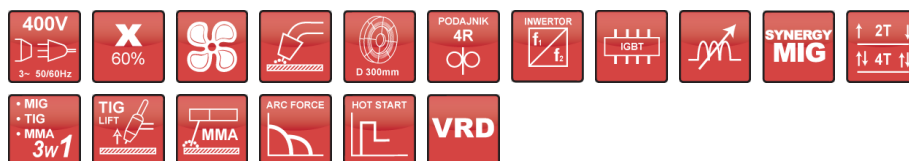

SPARTUS® EasyMIG 320

Product code:

EasyMIG320_pak_36-3

Package equipped: • **Device SPARTUS® EasyMIG 320** • **MIG gun SPARTUS® SPE 360 - 3m** • Additionally 2x wire guide roller 1.0-1.2V fi30 • Electrode holder • Work Clamp • Gas hose • User's manual

Product description

SYNERGIC AND STRONG IGBT MIG

SPARTUS® EasyMIG 320 is modern, inverter and professional MIG/MAG welding machine with inert or active gas shielding and MMA coated electrode welding. SPARTUS® EasyMIG 320 is powered by 400V three-phase.

The maximum welding current for SPARTUS® EasyMIG 320 is 300A for MIG/MAG and 250A for MMA. 60% high working cycle ensures stable output parameters during long-term welding work.

SPARTUS® EasyMIG 320 is equipped in the **synergy system for MIG/MAG welding** with the ability to manually change parameters. You can choose the following programs: CO2 steel, mixed steel, core wire welding. Making the synergy correction is signalled by flashing LED on the device's panel.

SPARTUS® EasyMIG 320 has a set of features supporting the welding process: **2T/4T work mode, inductance regulation, Arc Force, Hot Start and VRD**.

Professional four-roller feeder ensures stable welding wire feed. Resistant, robust and compact design makes it perfect equipment for difficult conditions, and there is a possibility of mounting a technical gas cylinder on the chassis of the device.

SPARTUS® EasyMIG 320 is a compact device designed mostly for efficient welding of steel constructions and working in difficult workshop conditions.

Technical parameters

Input	~3x 400V ± 10% 50 / 60 Hz
Welding current MIG [A]	50 - 300
Duty cycle MIG [%]	60
Output working voltage [V]	16,5 - 29
Wire feeding speed [m/min]	2 - 18
Wire feeder	built-in, 4-roll gear
Welding wire spool [kg]/[mm]	≤ 15 / 200/300
Wire diameter Ø [mm]	0.8, 1.0, 1.2
Additional features	2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, wire test, change polarity, inductance control, MMA welding
Welding current TIG [A]	10 - 300
Welding current MMA [A]	10 - 250
Current consumption [A]	16
Weight [kg]	38
Dimensions [mm]	920 x 470 x 740

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPERTHERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.