


SPARTUS® EasyMIG 325

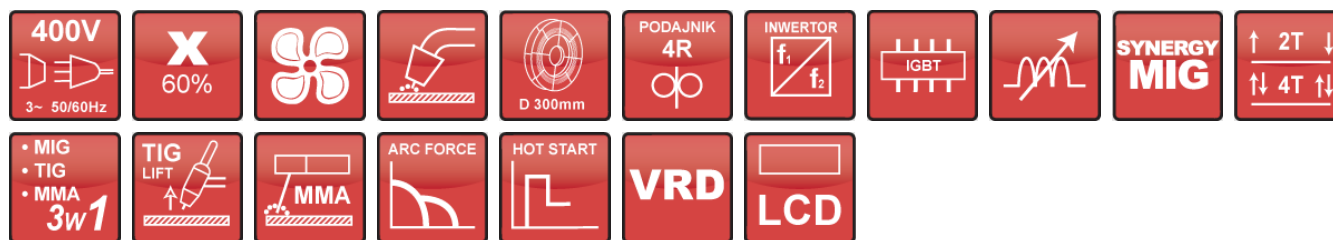

SPARTUS® EasyMIG 325

Product code:

EasyMIG325_pak_36-3



Package equipped: • **Device SPARTUS® EasyMIG 320LCD** • **MIG gun SPARTUS® SPE 360 - 3m** • Additionally 2x wire guide roller 1.0-1.2V fi30 • Electrode holder • Work Clamp • Gas hose • User's manual

Product description

SYNERGIC AND STRONG IGBT MIG WITH LCD DISPLAY

SPARTUS® EasyMIG 325 is modern, inverter and professional MIG/MAG welding machine with inert or active gas shielding and MMA coated electrode welding. SPARTUS® EasyMIG 325 is powered by 400V three-phase. The maximum welding current for SPARTUS® EasyMIG 325 is 300A for MIG/MAG and 250A for MMA. 60% high working cycle ensures stable output parameters during long-term welding work.

SPARTUS® EasyMIG 325 is equipped in the synergy system for MIG/MAG welding with the ability to manually change parameters. You can choose the following programs: CO₂ steel, mixed steel, core wire welding. Making the synergy correction is signalled by flashing LED on the machine's panel.

The machine is equipped with the following programs: CO₂ steel, mixed steel, aluminium, core wire welding, as well as manual welding mode.

SPARTUS® EasyMIG 325 has a set of features supporting the welding process: 2T/4T work mode, inductance regulation, Arc Force, Hot Start and VRD.

The modern LCD allows an easy and quick setting of the welding voltage and to manage the machine functions. When the parameters are corrected, the display sets the weld shape dependence regarding the voltage and shows graphically the recommended thickness of the material for the given current.

Professional four-roller feeder ensures stable welding wire feed. Resistant, robust and compact design makes it perfect equipment for difficult conditions, and there is a possibility of mounting a technical gas cylinder on the chassis of the machine.

SPARTUS® EasyMIG 325 is a compact machine designed mostly for efficient welding of steel constructions and working in difficult workshop conditions.

Technical parameters

Input	~3× 400V ± 10% 50 / 60 Hz
Welding current MIG [A]	50 - 300
Duty cycle MIG [%]	60
Output working voltage [V]	16,5 - 29
Wire feeding speed [m/min]	2 - 18
Wire feeder	built-in, 4-roll gear
Welding wire spool [kg]/[mm]	≤ 15 / 200/300
Wire diameter Ø [mm]	0.8, 1.0, 1.2
Additional features	2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, wire test, change polarity, inductance control, brazing (CuSi3), MMA welding, Post-gas
Welding current TIG [A]	10 - 300

Welding current MMA [A] 10 - 250

Current consumption [A] 16

Weight [kg] 39

Dimensions [mm] 920 x 470 x 740

PRODUCT CATEGORIES: [MACHINES](#), [CLASSIC](#), [MIG](#)

NW ® is independent subject and not connected to ABITIG®, AMPHENOL®, ASPA®, BESTER®, BINZEL®, CEA®, CEBORA®, ESAB®, EWM®, FALTIG®, FRO®, FRONIUS®, HARRIS®, HYPERTHERM®, KJELLBERG®, L-TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.