

## SPARTUS® ProMIG 200PFC



## SPARTUS® ProMIG 200PFC

Product code:

PROMIG200PFC-SOURCE

Equiped: • SPARTUS® ProMIG 200PFC • User's manual

## SPARTUS® ProMIG 200PFC - package SPM 150R



Product code:

PROMIG200PFC-PAK-15R-3

Package equiped: • SPARTUS® ProMIG 200PFC • MIG gun SPARTUS® SPM 150R [rotary torch head] • 3m electrode holder • 3m work clamp • Gas hose • User's manual

### Product description

## ProMIG 200PFC – TECHNOLOGICALLY ADVANCED, PORTABLE, SYNERGIC MIG 3IN1

SPARTUS® ProMIG 200PFC is a professional, portable, multi-process semi-automatic welding device. It enables MIG/MAG, TIG and MMA welding with maximum welding current of 200A. The unit is powered from a single-phase network 230V.

## TECHNOLOGICALLY ADVANCED WITH MULTILINGUAL MENU



The machine was produced with using of modern solutions such as inverter technology, IGBT power transistors, MCU controller, PWM technology, PFC filter. All of our technology solutions provide stable output performance under a variety of conditions, which has a direct effect on outstanding arc characteristics

and welded joint quality.

ProMIG 200PFC is equipped with a high-resolution digital color LCD display with an intuitive user interface. It has been programmed for maximum convenience when setting parameters. The undoubted advantage is the multilingual interface, available in languages: Polish, English, Spanish, German, French, Russian, Slovenian, Portuguese, Lithuanian, Serbian and Czech.

## VERSATILE – 3IN1 MACHINE

### MIG WELDING



#### 16 synergistic programmes

ProMIG 200PFC is equipped with 16 ready-made, synergistic programs for welding such materials as: steel, stainless steel, aluminum and CuSi3 brazing program. The user only selects the type of material to be welded and the diameter of the wire. Then, after setting the material thickness, the parameters adjust automatically. Additionally, it allows you to manually correct parameters.

The machine has a number of functions that support MIG / MAG welding processes:

**Wave Control** – precise arc dynamics adjustment Wave control ensures full control over the welding arc: it allows to reduce the amount of welding splashes and controls the width and depth of fusion.

**Burn Back** – precise adjustment of welding wire burning speed allows limit a risk of sticking the welding wire to the contact tip.

**Slow Feed** – so called gentle start-up of the wire feeder, recommended especially during welding with high amperage and high speed of wire feed. Smooth start of wire feed eliminates the risk of welding defects at the beginning of the weld.

**2T/4T** – choice of one of two operating modes.



Manual mode

ProMIG 200PFC also works in manual mode. It allows you to set all welding parameters in accordance with the individual requirements of the user.


#### Spool Gun

ProMIG 200PFC gives possibility of welding with a Spool Gun type welding holder with a built-in wire feeder. This significantly relieves the device and increases its range, allowing you to work with welding guns longer than 5 meters.

#### Polarity change

External change of welding polarity enables welding with self-shielding wires without gas. Both with the use of a standard MIG / MAG gun as well as a SPOOL GUN.

#### Stable wire feeder

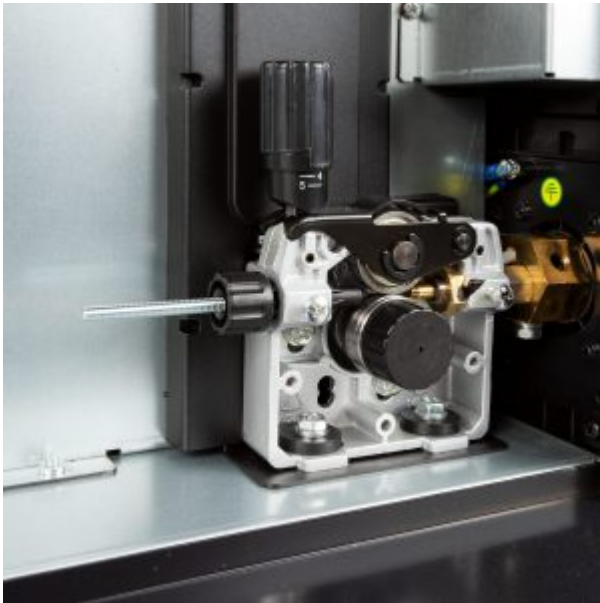

A high-quality, built-in two-roll feeder ensures stable welding wire feeding. Smooth movement during operation is essential in order to obtain a high-quality weld.

## TIG Lift WELDING



ProMIG 200PFC enables welding with the TIG Lift method. Thanks to the built-in solenoid valve, the device allows the use of a TIG welding torch with a microswitch ([proposed SPP17-4-mSRP1B-X-8SPA](#)).

ProMIG 200PFC has a functions that support TIG welding process:

2T/4T operating modes

Down Slope

Post-gas – gas flow after completion of welding

## MMA WELDING

The device also allows for basic welding by the MMA method. Built-in functions to support this process include:

Hot Start – for easier electrode ignition

Arc Force – for easier welding in forced positions

VRD – lower no-load voltage, increased work safety.

## MOBILE AND LIGHTWEIGHT

Compact size, lightweight and special design, make the ProMIG 200PFC extremely handy and easy to move. Perfect for professional renovation works in the field.

## APPLICATION



SPARTUS® ProMIG 200PFC is made in accordance with the latest trends in the production of welding equipment. Compact size and technologically advanced solutions make this welding machine a perfect device for the shipbuilding industry to perform minor repairs and renovations. It is also used in widely understood workshop works, light production works and in the automotive industry – car body repairs: welding and CuSi3 brazing, welding of exhaust systems.

## EQUIPMENT OPTIONS

SPARTUS® ProMIG 200PFC currently, in addition to the basic version containing the source, is offered in an expanded package that allows us to assemble a fully ready-to-use machine. The package includes: the device, MMA cables, and a high-quality ProMIG 150 gun with a rotating torch head.

It is also possible to customize the extended set with the aforementioned ProTIG SPP17 torch with a torch accessory upon individual order. This is a high-quality Polish welding torch made with American ProFlex cables, which maintain a high level of flexibility in both high and low temperatures.



SPARTUS® 150R gun  
with a rotary torch head

SPARTUS® ProTIG torch 17 1B X

In addition to the presented configurations, we additionally recommend compatible Spool Gun holders, gas regulators, foot controls and other SPARTUS® accessories.

## Technical parameters

Input	~1× 230V ± 10% 50 / 60 Hz
Welding current MIG [A]	200
Duty cycle MIG [%]	40
Output working voltage [V]	15,3 - 24
Wire feeding speed [m/min]	1,5 - 13
Wire feeder	built-in, 2-roll gear
Welding wire spool [kg]/[mm]	≤5 / 200
Wire diameter Ø [mm]	0.6, 0.8, 1.0
Additional features	spool gun, 2T/4T control , Arc Force, Hot Start, TIG lift welding, VRD, Burn Back, synergy, synergistic program, brazing (CuSi3), Slow feed, Burnback, MMA welding, Pre-gas, Post-gas
Welding current TIG [A]	10 - 200
Welding current MMA [A]	10 - 200
Current consumption [A]	MIG 25.4 / MMA 28.8 / TIG 20
Power factor (cosφ)	0,99
Efficiency η [%]	85
Insulation class	H
Protection class	IP21S
Weight [kg]	16.4
Dimensions [mm]	600 x 210 x 410

PRODUCT CATEGORIES: [MACHINES](#), [CLASSIC](#), [MIG](#)

TEC®, LINCOLN®, MAGNUM®, OTC®, SAF®, SHERMAN®, TELWIN®, THERMAL DYNAMICS®, TRAFIMET®, TUCHEL®.

Reference numbers and names belonged to above companies were called due to Property Right Law for buyer's convenience and they are related to code and spare part's description.

The products do not constitute an offer within the meaning of the Civil Code.